


CITY OF MILPITAS

HWY 237/I-880 INTERCHANGE MONUMENT SIGN

PROJECT 4170

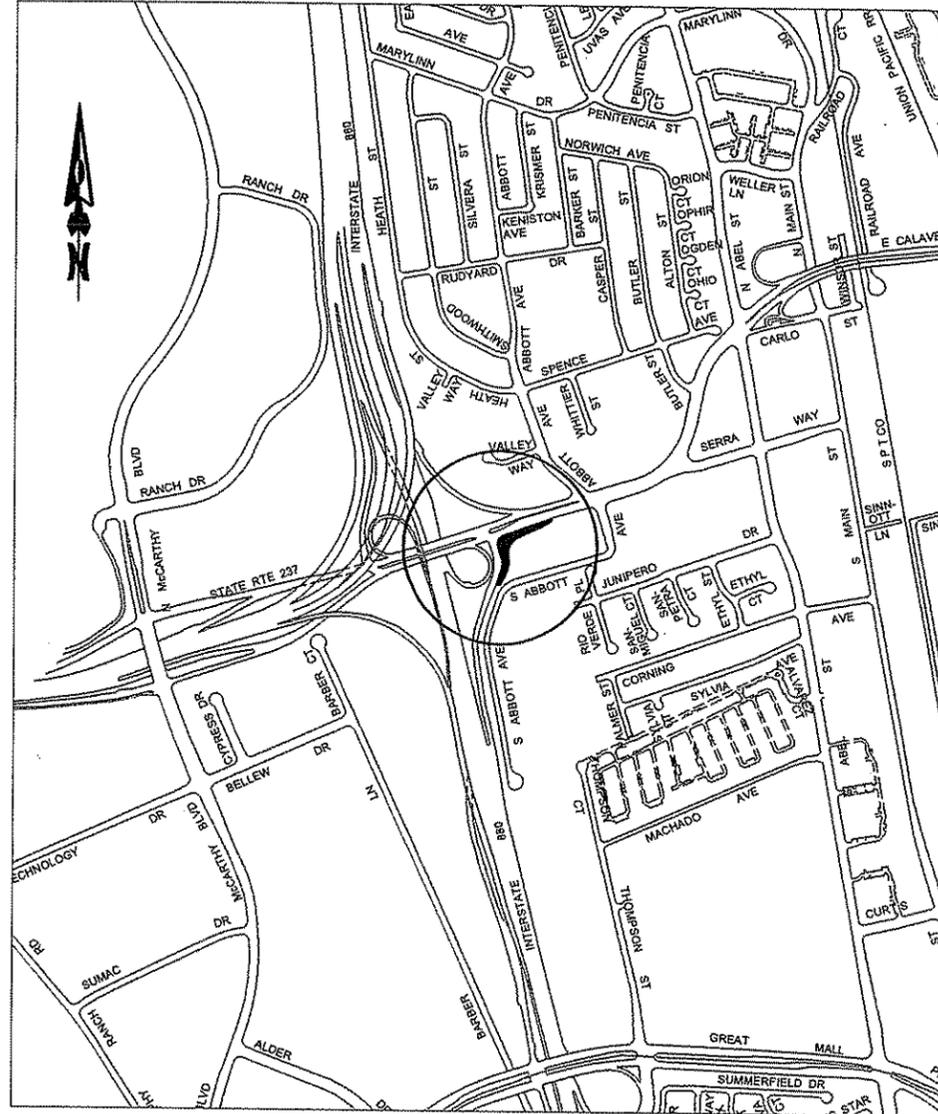

■ - PROJECT SITE

GENERAL NOTES:

PUBLIC SAFETY AND CONVENIENCE:

1. ALL MATERIAL AND WORKMANSHIP SHALL FULLY CONFORM WITH THE SPECIFICATIONS, STANDARDS AND ORDINANCES OF THE CITY OF MILPITAS AND THE STATE STANDARD SPECIFICATIONS DATED MAY 2006. STANDARD DRAWINGS AND DETAILS ARE AVAILABLE AT THE ENGINEERING DEPARTMENT, 408-586-3300.
2. PUBLIC WORKS INSPECTION SHALL BE NOTIFIED 48 HOURS PRIOR TO THE START OF ANY WORK BY THE CONTRACTOR OR SUBCONTRACTORS, 408-586-2884.
3. CONTRACTOR SHALL PROVIDE ADEQUATE TRAFFIC CONTROLS INCLUDING FLAG PERSONS PER SPECIFICATIONS AND SHALL SUBMIT A TRAFFIC CONTROL PLAN SUBJECT TO THE APPROVAL OF THE CITY ENGINEER PRIOR TO THE START OF WORK. THE CITY RESERVES THE RIGHT TO REQUIRE MODIFICATIONS TO THE APPROVED PLAN IN THE FIELD.
4. ALL EXISTING UTILITIES AND IMPROVEMENTS THAT BECOME DAMAGED DURING CONSTRUCTION SHALL BE COMPLETELY RESTORED TO THE SATISFACTION OF THE CITY ENGINEER, AT CONTRACTOR'S SOLE EXPENSE.
5. SAFETY MEASURES: AT ALL TIMES THE CONTRACTOR SHALL BE SOLELY AND COMPLETELY RESPONSIBLE FOR CONDITIONS OF THE JOB SITE INCLUDING TRAFFIC, PUBLIC SAFETY, WORKER SAFETY AND PROPERTY, (THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT JUST DURING NORMAL WORKING HOURS), CONTRACTOR SHALL BE RESPONSIBLE TO PROVIDE FOR ALL NECESSARY CONTINUOUS SAFETY REVIEWS OF THE CONDITIONS. WHENEVER THE CONTRACTOR'S OPERATIONS CREATE A CONDITION HAZARDOUS TO THE TRAFFIC OR PUBLIC, CONTRACTOR SHALL FURNISH, INSTALL AND MAINTAIN APPROPRIATE TRAFFIC SAFETY DEVICES AND SIGNAGE TO PREVENT ACCIDENTS OR DAMAGE OR INJURY TO THE PUBLIC.
6. CONTRACTOR SHALL MAINTAIN THE PROJECT SITES IN A NEAT AND PROFESSIONAL CONDITION AT ALL TIMES. CONTRACTOR SHALL REMOVE ALL DEBRIS AND EQUIPMENT AND NO STOCKPILING OF MATERIALS AT THE END OF EACH WORKING DAY.
7. CONTRACTOR SHALL CONFORM TO ALL APPLICABLE OCCUPATIONAL SAFETY AND HEALTH STANDARDS AND REGULATIONS BY THE CITY, COUNTY AND STATE.

CONSTRUCTION OPERATIONS:

1. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE EXISTENCE AND LOCATION OF ALL UNDERGROUND UTILITIES. THE CONTRACTOR SHALL NOTIFY UTILITY COMPANIES 48 HOURS PRIOR TO CONSTRUCTION TO FIELD LOCATE UTILITIES, CONTACT UNDERGROUND SERVICE ALERT AT 800-642-2444 AND OBTAIN A REFERENCE NUMBER. ANY ADDED COST ON THE PART OF THE CONTRACTOR AS A RESULT OF THE ACTUAL LOCATIONS OF EXISTING UTILITIES BEING DIFFERENT FROM THOSE SHOWN ON THE PLANS SHALL BE BORNE BY THE CONTRACTOR AND ASSUMED INCLUDED IN THE CONTRACT UNIT PRICE.
2. HAUL ROUTES SHALL BE ONLY ON THOSE STREETS AS PRE-APPROVED BY THE CITY ENGINEER.
3. ALL SURVEY MONUMENTATIONS SHALL BE PROTECTED AND PERPETUATED IN PLACE. ANY DISTURBED OR COVERED MONUMENTS SHALL BE RESET BY A REGISTERED LAND SURVEYOR AT THE DIRECTION OF THE CITY ENGINEER.
4. CONTRACTOR SHALL COMPLY WITH THE PROVISIONS OF SECTION D-05, "SOUND CONTROL" OF THE PROJECT SPECIFICATIONS. FURTHER, BY CITY OF MILPITAS ORDINANCE, THE CONTRACTOR SHALL NOT ENGAGE OR PERMIT OTHERS TO ENGAGE IN ANY CONSTRUCTION RELATED OPERATIONS INCLUDING DELIVERY OF MATERIALS AND/OR EQUIPMENT TO OR FROM THE CONSTRUCTION SITE EXCEPT WITHIN THE HOURS OF 7:00 AM TO 7:00 PM ON WEEKDAYS AND WEEKENDS. NO CONSTRUCTION IS PERMITTED ON THE FOLLOWING HOLIDAYS: NEW YEARS DAY, MEMORIAL DAY, INDEPENDENCE DAY, LABOR DAY, THANKSGIVING DAY, AND CHRISTMAS DAY. FOR WORKING HOURS REFER TO SPECIFICATIONS, SECTION C-29.
6. CONTRACTOR SHALL COMPLY WITH THE CITY'S NON-POINT SOURCE POLLUTION PREVENTION ORDINANCE AND THE STORM WATER POLLUTION PREVENTION PLAN BEST MANAGEMENT PRACTICES (BMP) FOR THIS PROJECT.
6. CONTRACTOR SHALL SUBMIT AND OBTAIN FAVORABLE REVIEW BY THE ENGINEER OF CONTRACTOR'S CONSTRUCTION SCHEDULE, STORM WATER POLLUTION PREVENTION PLAN, TRAFFIC CONTROL PLAN, AND SUBMITTALS IN ACCORDANCE WITH THESE CONTRACT DOCUMENTS, PRIOR TO BEGINNING ANY WORK WITHIN THE CONSTRUCTION SITE.
7. CONTRACTOR SHALL MEET WITH PROJECT INSPECTOR AND SIGN OFF ON QUANTITIES WITHIN 48 HOURS OF COMPLETING EACH SEGMENT.
8. CONTRACTOR IS RESPONSIBLE FOR VERIFYING QUANTITIES AND SHALL OBTAIN AN APPROVED CHANGE ORDER PRIOR TO EXCEEDING ESTIMATED QUANTITIES.
9. THERE WILL BE NO OVERNIGHT STREET CLOSURES. CONTRACTOR MUST MAKE PROVISIONS TO ALLOW FOR THROUGH TRAFFIC AND ACCESS TO ALL DRIVEWAYS. CONTRACTOR MUST STAGE ACCORDINGLY AND NOT REMOVE ANY LARGER AREAS THAN CAN BE CONSTRUCTED AND REOPENED IN A GIVEN DAY.
10. SIDEWALKS AND PEDESTRIAN AREAS SHALL BE SWEEPED CLEAN AT THE END OF EACH DAY.

INDEX SHEET		
SHEET	DESCRIPTION	SHOP DWG.
1	TITLE SHEET	
2	MONUMENT SIGN RENDERING	
3	LIGHT FIXTURE & CITY LOGO DETAIL	
4	MONUMENT ELEVATION	A-1
5	MONUMENT SECTION VIEW	A-2
6	MONUMENT PLAN VIEW	A-3
7	LETTERS & PLATES BRACKET DETAIL	A-4
8	CROSS SECTION DETAIL OF PEDESTAL & MOUNTING PIPE	A-5
9	IRRIGATION NOTES	
10	LEGENDS & IRRIGATION TABLES	
11	PLANTING SHEET	
12	IRRIGATION SHEET	
13	ELECTRICAL SHEET	
14	MULCH/FABRIC SHEET	
15	BLUEPRINT FOR A CLEAN BAY	

CITY OF MILPITAS

PROJECT NO. 4170

RECOMMENDED FOR BIDDING BY: Jeff Leung, Acting Principal Civil Engineer

APPROVED FOR BIDDING BY: Greg Armentrout, Public Works Director/City Engineer

DATE: _____ DATE: _____

SCALE: _____ SHEET 1 of 15