




PLAN

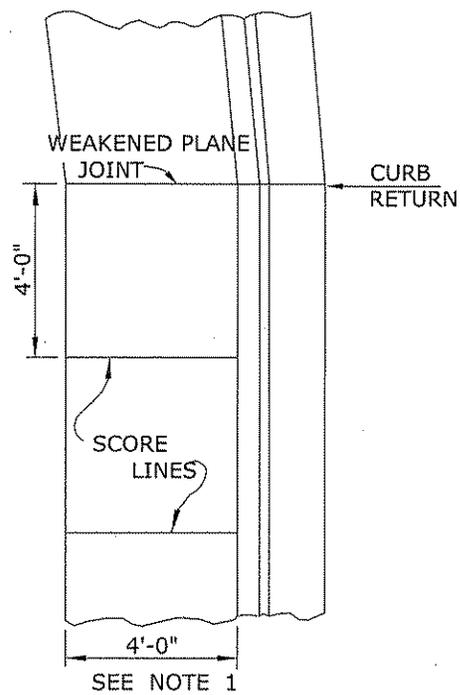

PLAN

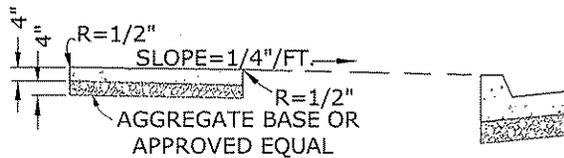


TYPICAL SECTION
CURB & WALK SEPARATED

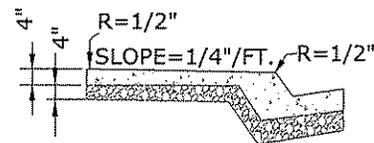


TYPICAL SECTION
CURB & WALK CONTIGUOUS

NOTES:

1. Width of the sidewalk shall be 4' unless otherwise noted on plans. Residential sidewalk shall be constructed on both sides of residential street.
2. Weakened plane joints shall be constructed at ends of curb returns, curb inlets, other structures and at 12' intervals except in driveway section. Joints shall match adjacent improvements.
3. Use Portland Cement Concrete containing not less than 564 lbs. of Type I or I/II Portland Cement per cubic yard with a compressive strength of not less than 3000 psi. at 28 days, with a medium broom finish.
4. Score lines shall be 1/4" deep & 48" apart.
5. Use 3-#4 X 9" dowels at the expansion joints or when jointing new sidewalk to existing.

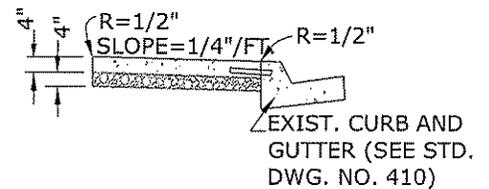

TYPICAL SECTION
CURB & WALK CONTIGUOUS



WEAKENED PLANE JOINT

NOT TO SCALE

CITY OF MILPITAS, ENGINEERING DIVISION

STANDARD DRAWING

RESIDENTIAL SIDEWALK

NO. 427

REVISION

DATE

1

1975

2

2001

3

2010

3

APPROVED BY:

PUBLIC WORKS DIRECTOR / CITY ENGINEER RCE No. 40283

DATE : 6/15/10

SHEET 1 OF 1