

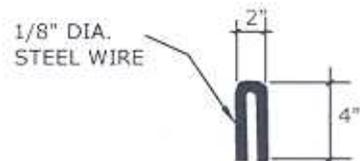


PLAN

"ABOVE GRADE"
WITH STRAW BALE

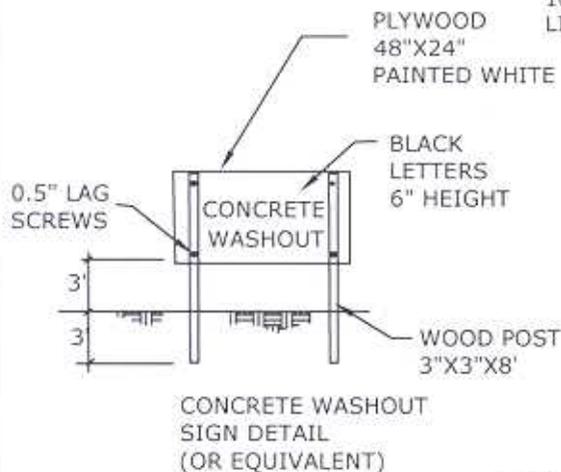

STAPLE DETAIL

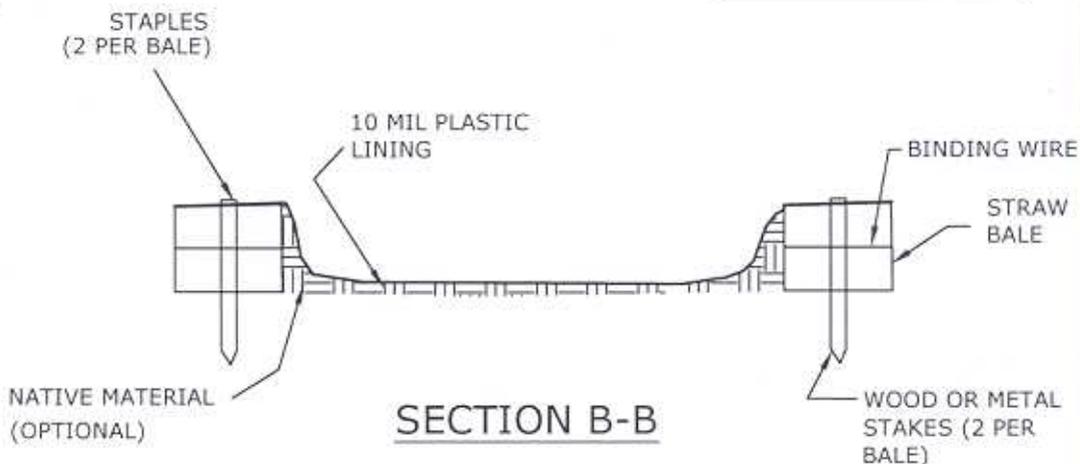

SECTION B-B

Notes:

1. Actual layout determined in field
2. The concrete washout sign shall be installed within 30 ft. of the temporary concrete washout facility.
3. Unless the soils engineer has approved the concrete waste as on-site fill (subject to City Engineer approval), the concrete waste shall be properly disposed of off-site.

NOT TO SCALE

CITY OF MILPITAS, ENGINEERING DIVISION			STANDARD DRAWING
REVISION	DATE	DESIGNED: MK	NO. 475
		DRAWN: JH	CONCRETE WASHOUT
		CHECKED: JH	
APPROVED BY:			ORIGINAL DATE: 8/24/05
CITY ENGINEER			DATE: 8/24/05
			SHEET 1 OF 1