


PLAN VIEW

SEDIMENT, ORGANIC MATTER, AND NATIVE SEEDS ARE CAPTURED BEHIND THE ROLLS.

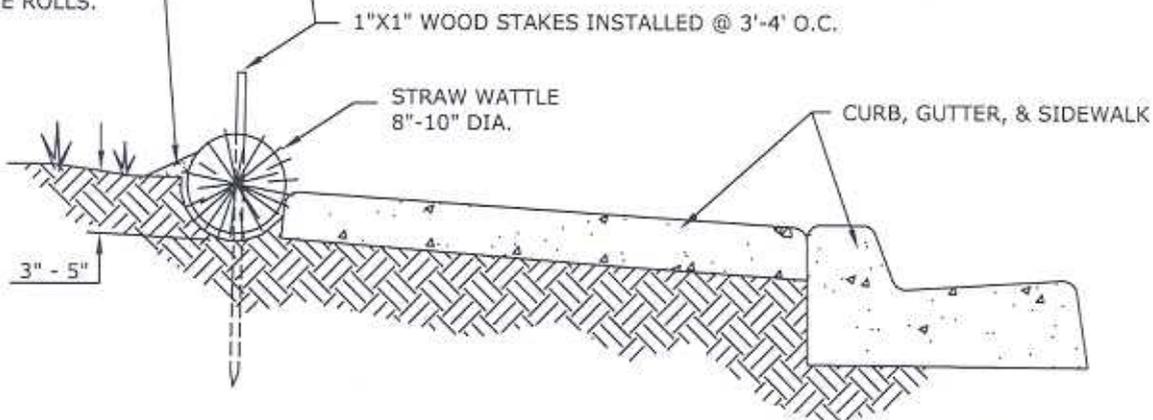

SECTION A - A

Notes:

1. Straw roll installation requires the placement and secure staking of the roll in a trench, 3"-5" (75-125mm) deep. Runoff must not be allowed to run under or around roll.
2. When detached sidewalk exists, place wadding at back of sidewalk and grade park strip so that finish grade is 2" below top of curb.

NOT TO SCALE

CITY OF MILPITAS, ENGINEERING DIVISION			STANDARD DRAWING NO. 469
REVISION	DATE	DESIGNED: MK	
		DRAWN: JH	ORIGINAL: 8/24/05 DATE
		CHECKED: JH	SHEET 1 OF 1
		APPROVED BY:	3/24/04 DATE: 8/24/05
		CITY ENGINEER	