CITY OF MILPITAS
2006 STREET SLURRY SEAL PROJECT
PROJECT 4229

GENERAL NOTES:

PUBLIC SAFETY AND CONVENIENCE:

1. ALL MATERIAL AND WORKMANSHIP SHALL FULLY CONFORM WITH THE SPECIFICATIONS, STANDARDS AND ORDINANCES OF THE CITY OF MILPITAS AND THE STATE STANDARD SPECIFICATIONS DATED JULY 2002. STANDARD DRAWINGS AND DETAILS ARE AVAILABLE AT THE ENGINEERING DEPARTMENT, 408-586-3300

2. PUBLIC WORKS INSPECTION SHALL BE NOTIFIED 48 HOURS PRIOR TO THE START OF ANY WORK BY THE CONTRACTOR OR SUBCONTRACTORS, 408-586-2884

3. CONTRACTOR SHALL PROVIDE ADEQUATE TRAFFIC CONTROLS INCLUDING FLAG PERSONS PER SPECIFICATIONS AND SHALL SUBMIT A TRAFFIC CONTROL PLAN SUBJECT TO THE APPROVAL OF THE CITY ENGINEER PRIOR TO THE START OF WORK. THE CITY RESERVES THE RIGHT TO REQUIRE MODIFICATIONS TO THE APPROVED PLAN IN THE FIELD.

4. ALL EXISTING UTILITIES AND IMPROVEMENTS THAT BECOME DAMAGED DURING CONSTRUCTION SHALL BE COMPLETELY RESTORED TO THE SATISFACTION OF THE CITY ENGINEER, AT CONTRACTOR'S SOLE EXPENSE.

5. SAFETY MEASURES: AT ALL TIMES THE CONTRACTOR SHALL BE SOLELY AND COMPLETELY RESPONSIBLE FOR CONDITIONS OF THE JOB SITE INCLUDING PUBLIC SAFETY, WORKER SAFETY AND PROPERTY, (THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT JUST DURING NORMAL WORKING HOURS) AND FOR ALL NECESSARY INDEPENDENT ENGINEERING REVIEWS OF THE CONDITIONS. THE ENGINEER'S JOB SITE REVIEW IS NOT INTENDED TO INCLUDE REVIEW OF THE ADEQUACY OF THE CONTRACTOR'S SAFETY MEASURES

6. CONTRACTOR SHALL NOTIFY MILPITAS SCHOOL DISTRICT, ALL TRANSPORTATION COMPANIES AND EMERGENCY SERVICES OF PAVING SCHEDULE TO ALLOW COORDINATION. SEE SPECIFICATIONS, SECTION E-01 FOR LISTINGS, PHONE NUMBERS AND REQUIREMENTS.

7. CONTRACTOR SHALL PROVIDE ALL BUSINESSES AND RESIDENCES ADVANCE NOTICE OF DRIVEWAY DISRUPTIONS IN ACCORDANCE WITH SPECIFICATIONS REQUIREMENTS.

8. CONTRACTOR SHALL MAINTAIN THE PROJECT SITES IN A NEAT AND PROFESSIONAL CONDITION AT ALL TIMES. CONTRACTOR SHALL NOT STORE MATERIALS ON PUBLIC ROADWAYS OVERNIGHT. CONTRACTOR SHALL REMOVE ALL DEBRIS AND EQUIPMENT AT THE END OF EACH WORKING DAY.

9. CONTRACTOR SHALL SCHEDULE THE WORK SO THAT PARKING IS NOT RESTRICTED FOR ANY TWO CONNECTING (LOOPED) STREETS.

CONSTRUCTION OPERATIONS:

1. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE EXISTENCE AND LOCATION OF ALL UNDERGROUND UTILITIES. THE CONTRACTOR SHALL NOTIFY UTILITY COMPANIES 48 HOURS PRIOR TO CONSTRUCTION TO FIELD LOCATE UTILITIES. CONTACT UNDERGROUND SERVICE ALERT AT 800-642-2444 AND OBTAIN A REFERENCE NUMBER. ANY ADDED COST ON THE PART OF THE CONTRACTOR AS A RESULT OF THE ACTUAL LOCATIONS OF EXISTING UTILITIES BEING DIFFERENT FROM THOSE SHOWN ON THE PLANS SHALL BE BORNE BY THE CONTRACTOR AND ASSUMED INCLUDED IN THE CONTRACT UNIT PRICE.

2. ALL QUANTITIES AND PAY ITEMS ARE AND WILL BE BASED ON ACTUAL FIELD MEASUREMENTS. ALL LOCATIONS OF IRON AND TRAFFIC LOOPS ON PLANS ARE APPROXIMATE AND SHOULD BE FIELD LOCATED PRIOR TO SLURRY SEAL.

3. HAUL ROUTES SHALL BE ONLY ON THOSE STREETS AS PRE-APPROVED BY THE CITY ENGINEER.

4. ALL SURVEY MONUMENTATIONS SHALL BE PROTECTED AND PERPETUATED IN PLACE. ANY DISTURBED OR COVERED MONUMENTS SHALL BE RESET BY A REGISTERED CIVIL ENGINEER OR LAND SURVEYOR AT THE DIRECTION OF THE CITY ENGINEER.

5. CONTRACTOR SHALL COMPLY WITH THE PROVISIONS OF SECTION D-05, "SOUND CONTROL" OF THE PROJECT SPECIFICATIONS. FURTHER, BY CITY OF MILPITAS ORDINANCE, THE CONTRACTOR SHALL NOT ENGAGE OR PERMIT OTHERS TO ENGAGE IN ANY CONSTRUCTION RELATED OPERATIONS INCLUDING DELIVERY OF MATERIALS AND/OR EQUIPMENT TO OR FROM THE CONSTRUCTION SITE EXCEPT WITHIN THE HOURS OF 7:00 AM TO 7:00 PM ON WEEKDAYS AND WEEKENDS. NO CONSTRUCTION IS PERMITTED ON THE FOLLOWING HOLIDAYS: NEW YEARS DAY, MARTIN LUTHER KING, JR.'S BIRTHDAY, PRESIDENTS' DAY, MEMORIAL DAY, LINCOLN'S BIRTHDAY INDEPENDENCE DAY, LABOR DAY, VETERANS DAY, THANKSGIVING DAY, DAY AFTER THANKSGIVING, DAY BEFORE CHRISTMAS, AND CHRISTMAS DAY.

6. CONTRACTOR SHALL COMPLY WITH THE CITY'S NON-POINT SOURCE POLLUTION PREVENTION ORDINANCE AND THE STORM WATER POLLUTION PREVENTION PLAN BEST MANAGEMENT PRACTICES (BMP) FOR THIS PROJECT.

7. ALL PAINT THICKNESS SHALL BE A MINIMUM OF 15 MILS OF THICKNESS. STRIPING PAINT FOR CITY STREETS SHALL BE AS FOLLOWS OR APPROVED EQUALS: TMT PATHWAY #2677A7 WATER BASE BLACK, TMT PATHWAY #2676A5 WATER BASE YELLOW, TMT PATHWAY #2675A5 WATER BASE WHITE, WITH GLASS BEADS. THE CONTRACTOR SHALL USE THE CITY'S STANDARD STENCILS. COORDINATE PICKUP BY CALLING (408) 586 - 2884, 48 HRS AHEAD OF TIME FOR PICK-UP.

8. CONTRACTOR SHALL SUBMIT AND OBTAIN FAVORABLE REVIEW BY THE ENGINEER OF CONTRACTOR'S CONSTRUCTION SCHEDULE, STORM WATER POLLUTION PREVENTION PLAN, TRAFFIC CONTROL PLAN, AND SUBMITTALS IN ACCORDANCE WITH THESE CONTRACT DOCUMENTS, PRIOR TO BEGINNING ANY WORK WITHIN THE CONSTRUCTION SITE.

9. CONTRACTOR SHALL MEET WITH PROJECT INSPECTOR AND SIGN OFF ON QUANTITIES WITHIN 48 HOURS OF COMPLETING EACH SEGMENT.

10. CONTRACTOR IS RESPONSIBLE FOR VERIFYING QUANTITIES AND SHALL OBTAIN AN APPROVED CHANGE ORDER PRIOR TO EXCEEDING ESTIMATED QUANTITIES.

11. ALL RESPONSIBLE CONTRACTOR REPRESENTATIVES WILL BE REQUIRED TO ATTEND A PRE-CONSTRUCTION MEETING WHICH WILL BE SCHEDULED BY THE CITY PRIOR TO THE COMMENCEMENT OF ANY WORK.

12. CONTRACTOR MUST NOTIFY CITY INSPECTOR AFTER CAT-TRACKING AND OBTAIN APPROVAL PRIOR TO THE FINAL STRIPING.

13. THERE WILL BE NO OVERNIGHT STREET CLOSURES. CONTRACTOR MUST MAKE PROVISIONS TO ALLOW FOR THROUGH TRAFFIC AND ACCESS TO ALL DRIVEWAYS CONTRACTOR MUST STAGE ACCORDINGLY AND NOT REMOVE ANY LARGER AREAS THAN CAN BE CONSTRUCTED AND REOPENED IN A GIVEN DAY

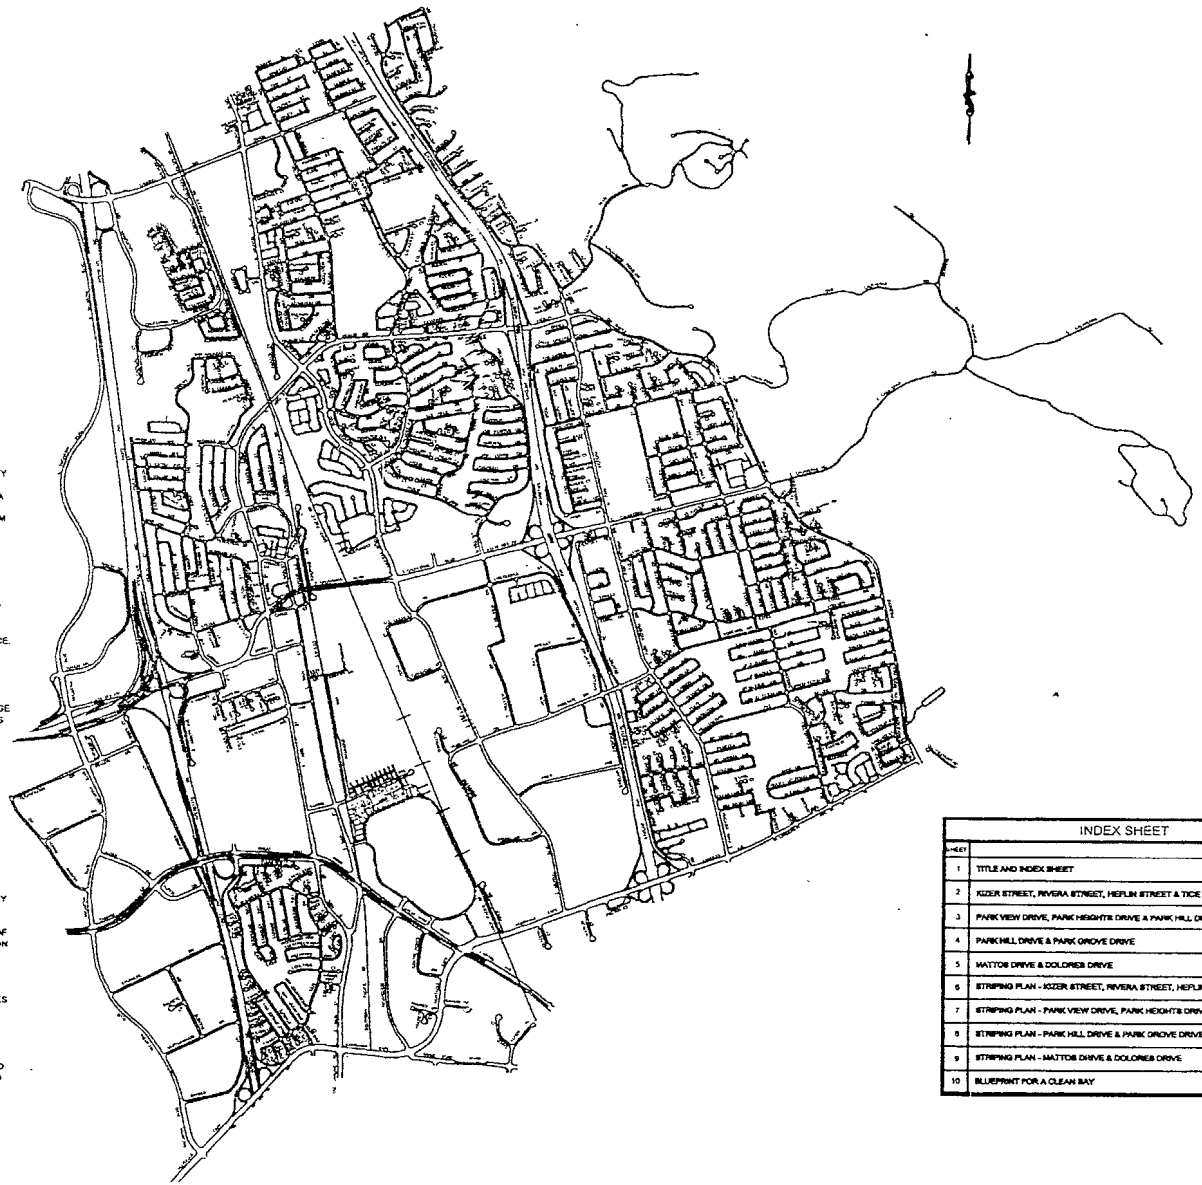

INDEX SHEET

SHEET	
1	TITLE AND INDEX SHEET
2	KIZER STREET, RIVERA STREET, HEFLIN STREET & TICE DRIVE
3	PARK VIEW DRIVE, PARK HEIGHTS DRIVE & PARK HILL DRIVE
4	PARK HILL DRIVE & PARK GROVE DRIVE
5	MATTOS DRIVE & DOLORES DRIVE
6	STRIPING PLAN - KIZER STREET, RIVERA STREET, HEFLIN STREET & TICE DRIVE
7	STRIPING PLAN - PARK VIEW DRIVE, PARK HEIGHTS DRIVE, PARK HILL DRIVE
8	STRIPING PLAN - PARK HILL DRIVE & PARK GROVE DRIVE
9	STRIPING PLAN - MATTOS DRIVE & DOLORES DRIVE
10	BLUEPRINT FOR A CLEAN BAY

TITLE SHEET
INDEX SHEET

PROJECT NO. 4229

CITY OF MILPITAS
2006 STREET SLURRY SEAL PROJECT
PROJECT 4229

Revisions

Record Drawings